



Technical Data: Flex^ePort 500 Heavy-Duty Boom

Load max. : Single arm up to 640 kg
Dual arm up to 300 kg

Break Type : Electromagnetic passive brake

Electrical : Rated voltage: AC 100-240 V, rated power 200 W

Colours : Arm and equipment manager: RAL 9010

SINGLE EXTENSION ARM:

Length	Gross Load Capacity	Net Load Capacity *	Net Load Capacity ‡
600 mm	640 kg	615 kg	602 kg
800 mm	470 kg	445 kg	432 kg
1000 mm	370 kg	345 kg	332 kg
1200 mm	300 kg	275 kg	262 kg

* With iBox 20 equipment manager

‡ With iBox 20 equipment manager and 4 shelves

DUAL EXTENSION ARMS:


Length	Gross Load Capacity	Net Load Capacity *	Net Load Capacity ‡
600/600 mm	300 kg	275 kg	262 kg
600/800 mm	260 kg	235 kg	222 kg
600/1000 mm	220 kg	195 kg	182 kg
600/1200 mm	190 kg	165 kg	152 kg
800/600 mm	260 kg	235 kg	222 kg
800/800 mm	220 kg	195 kg	182 kg
800/1000 mm	190 kg	165 kg	152 kg
800/1200 mm	170 kg	145 kg	132 kg
1000/600 mm	220 kg	195 kg	182 kg
1000/800 mm	190 kg	165 kg	152 kg
1000/1000 mm	170 kg	145 kg	132 kg
1000/1200 mm	150 kg	125 kg	112 kg
1200/600 mm	190 kg	165 kg	152 kg
1200/800 mm	170 kg	145 kg	132 kg
1200/1000 mm	150 kg	125 kg	112 kg
1200/1200 mm	130 kg	105 kg	92 kg

* With iBox 20 Equipment Manager

‡ With iBox 20 equipment manager and 4 shelves



SINGLE EXTENSION ARM

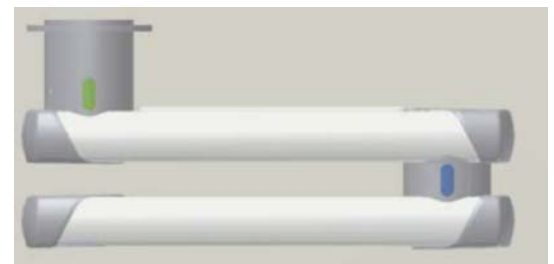

DUAL EXTENSION ARMS



Technical Data: Flex[®]Port 500 Heavy-Duty Boom

EQUIPMENT MANAGER CHOICES:

Equipment Manager	Layers	Service Positions (gases / electrics / data combined)	With Optional 20" Backbone	With optional 40" Backbone
iBox 10	1	12	15	19
iBox 20	2	24	27	31
iBox 30	3	36	39	43
Shelving Capacity	-	-	2	4

